


Bonded Seals German Metric Size Guide

ALT. REF	Thread Size DIA M	A +0.13 -0.00	B +0.10 -0.10	C +0.10 -0.10	D +0.25 -0.00	E +0.10 -0.10	F (S/C) +0.20 -0.20		
201	3.5	7.20	5.20	4.10	0.30	1.00	-		
202	4	7.00	5.40	4.50			3.40		
203	5	9.00	6.80	5.70			4.50		
204	5	10.00	7.40	5.70			4.50		
205	5.5	9.20	7.20	6.20			4.70		
206	6	10.00	8.00	6.70			4.70		
207	6	11.00	8.20	6.70			4.70		
210	6.7	10.20	8.60	7.30			5.77		
212	8	13.00	10.00	8.70			6.40		
213	8	14.00	10.40	8.70			6.40		
215	8.5	13.30	10.50	9.30			6.90		
216	10	15.88	12.00	10.35			0.40	2.00	8.56
217	10	16.00	12.40	10.70				8.05	
218	10	18.00	12.40	10.70				8.05	
219	11	16.30	12.70	11.40	9.80				
221	11	19.10	13.50	11.80	9.80				
222	12	18.00	14.30	12.70	9.73				
223	12	20.00	14.40	12.70	9.73				
225	13	22.00	15.40	13.70	10.80				
226	13.5	18.70	15.70	14.00	11.30				
227	14	22.00	16.40	14.70	11.38				
229	16	24.00	18.40	16.70	13.41				
230	17	24.00	19.20	17.40	13.08				
231	17.5	24.70	20.10	18.00	13.60				
232	18	26.00	20.40	18.70	14.76				
233	20	28.00	22.50	20.70	16.76				
234	21	28.70	23.30	21.50	0.40	2.50	17.80		
236	22	30.00	24.40	22.70		18.74			
238	24	32.00	26.40	24.70		20.11			
239	26	35.00	28.40	26.70		22.30			
240	27	36.00	29.00	27.20		2.00	23.30		
242	30	39.00	33.00	31.00			25.70		
243	33	42.00	35.80	33.70			28.70		
244	33	43.00	36.40	34.30			28.70		
245	36	46.00	38.80	36.70		31.10			
246	39	51.00	41.90	40.00		2.50	34.10		
247	42	53.00	44.40	42.70			36.50		
248	48	59.00	50.80	48.70		3.00	41.90		
250	52	64.50	56.40	89.09			-		
254	88	101.35	92.10	89.09		3.25	-		



Note: There is a permitted moulding flashline on the inner diameter C
 All dimensions in mm in accordance with AGS 1186
 Height may vary

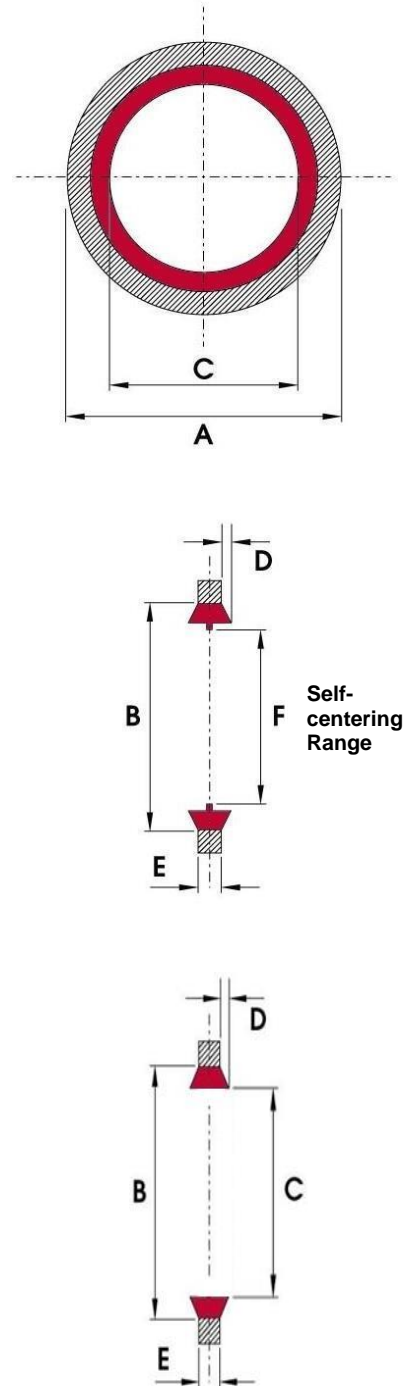